FOR VERNON COUNTY, WISCONSIN


Note: This form is intended and designed to fulfill all requirements of Wisconsin Administrative Code, Chapter AE-7.08, U.S. Public Land Survey Monument Record (3)(a)(b)(c)(d)(e)(f)(g)(h)(i). Use additional sheets if necessary.

(a) Sections 12

Township(s) 14 North, Range(s) <u>07</u> West.

Vernon County Coordinates: N. 199869.058

630351.313




(b)(f)(h) Description of monument found at this corner and if it was accepted, state all evidence (material, testimonial, occupational, plats records, other monuments) used as a basis for accepting. If not accepted or nothing was found, state evidence used as basis for establishing location and what was set. If re-established through lost corner proportionate methods, indicate all monuments, distances and directions used

1846-1847 Alfred L. Brown established original corner location 40.04 1/2 chains East of the Southwest corner of Section 12.

December 29, 1998 - I set a east of an equi-distance split. I then set witnesses as shown. Southeast corners of Section 12 and north-south occupation. The position falls approximately 8 feet Vernon County Monument on a straight line between the Southwest and

established corner, show the distances between the two corners and also indicate ties to disputed corner. (c)(d)(e) Plan view of corner with ties to at lest four (4) witness monuments. If in disagreement with previously

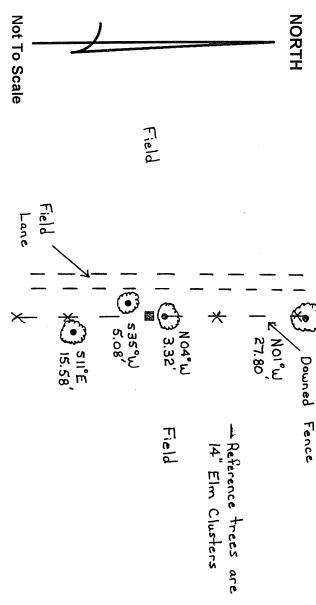

W. Placed Vernon County Monument

II Placed 60d spike

Monument Record is correct and complete to the best of my knowledge (I) Certify that the corner location on this record was determined by me or under my direction and control and that this U.S. Public Land survey

SULVE SULVE

and belief.

Signature

Carl M.

Sandsnes

December 31,

Date

INDEX NO.

Filed for record in Vernon County Surveyor's Office on

8